


## Network Video Recorders

### SP-NVR5108-M

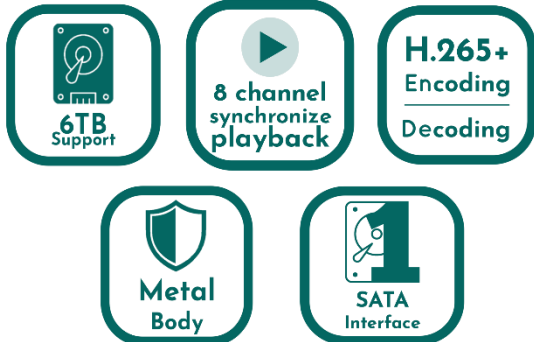

### Key Features

- Connectable to network cameras
- Encoding at up to 5MP resolution
- HDMI output and VGA output at up to 1920x 1080P resolution.
- New GUI and supports starting record with one key
- Instant playback for assigned camera during multi-channel live view mode
- Support up to 8-ch synchronous playback

# SP-NVR5108-M



## Specifications:

Video compression	:	H.265+/H.265
Digital Video Input	:	RJ 45 Ethernet Interface
Supported camera types	:	5MP/25Hz, 10800p/30Hz
IP video input	:	Up to 5MP resolution
Audio compression	:	G.711u
Audio input	:	1-ch, RCA (2.0 Vp-p, 1 K $\Omega$ )
HDMI/VGA output	:	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Encoding resolution	:	5MP/4MP/1080p/720p
Frame rate	:	5MP/4MP/1080p@25FPS/720p@30FPS
Video bit rate	:	32 Kbps to 4 Mbps
Audio output	:	1-ch, RCA (Linear, 1 K $\Omega$ )
Audio bit rate	:	64 Kbps
Stream type	:	Video, Video & Audio
Dual stream	:	Support
Protocol	:	Plug & Play, ONVIF
Synchronous playback	:	8-ch
Network protocols	:	TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
SATA	:	1 SATA interface
Capacity	:	Up to 6 TB
Network interface	:	1, RJ45 10M/100M self-adaptive Ethernet interface
USB interface	:	2 × USB 2.0
Power supply	:	12 VDC $\pm$ 25%
Consumption (without HDD)	:	$\leq$ 15 W
Working temperature	:	-10 $^{\circ}$ C to +55 $^{\circ}$ C (14 $^{\circ}$ F to 131 $^{\circ}$ F)
Working humidity	:	10% to 90%
Dimensions (W×D×H)	:	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)
Weight (without HDD)	:	$\leq$ 1 kg (2.2 lb)